

ABS-Lock® V-Rivet
L5-RIVET



EN795:2012
TYPE A

für min. / for min.
T=0,63 mm / 1/32"

Gewerbering 3
47623 Kevelaer
Deutschland

Service


ABS Safety GmbH

Tel.: +49 (0) 28 32 - 9 72 81 - 0
Fax: +49 (0) 28 32 - 9 72 81 - 29
www.absturzicherung.de
www.fall-arrest.eu

ABS Safety Inc.

Phone: 1-800-485-1285
Fax: 1-678-417-627
www.abs-fall-protection.com

MoA-176-01

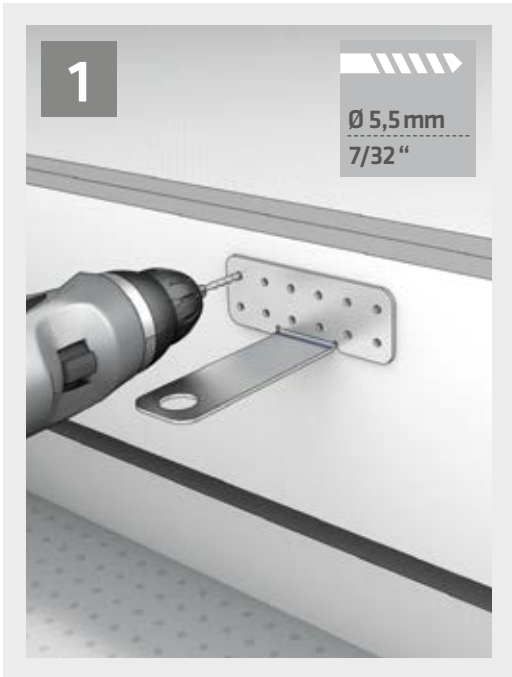

[ABS] ABS SAFETY GMBH ³
 Kevelaer, Germany
 info@absturzversicherung.de
 www.absturzversicherung.de

**Mustertypenschild /
Sample only**

6	Normen / Standards	-
7	Max. Nutzer gleichzeitig / Max. No. of simultaneous users	-
11	Modellnummer / Model number	-
12	Materialien / Materials	-
13	Dekra geprüft / Dekra tested	-
	-	-

Chargennummer /
Batch number

8	CE	9	ABS	10	DEKRA
	0158		Z-34.240		2008 geprüft nach EN 12443 L5-RIVET

	EN353-2	EN360	 PSA	 max. 1
	EN354	EN361		
	EN355	EN362		

min. 100 mm
min. 3 15/16"

min. 0,63 mm
min. 1/32"

min. 20 mm
min. 25/32"

**BLINDNIETE
BLIND RIVET**
5,2 x 19,1 mm
13/64" x 3/4"

